



# INSTALLATION OF SEMI CUSTOM SEAT COVERS



## We thank you for your order.

A good installation of the seat covers will enhance the look of your interior and protect your original upholstery.

### This package contains:

1. Your seat cover order.
2. Bags of hooks. (2 for the front and 4 for front&rear).
3. Plastic hexagon fasteners (4 for front and 8 for complete set).  
(attach to the elastics on the inside of the cover, & push between the seat&backrest)

### Accessories


Best way to attach the hooks to the elastics



Hooks

Hexagon

Hooks

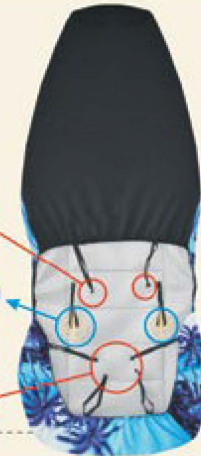

For seat covers in one piece (highback seat) you can skip part 1

### 1 Headrest


For seat covers with separate headrest covers, please first remove the headrest. We have outlined the two most common ways to remove your headrest.



One- plastic cap with a push button- push the button towards the inside and lift the headrest.




Two- plastic cap that has pinhole- remove pin, and lift headrest



Slip the headrest covers over the headrest

### 2 For front seats




Slide the seat cover over your seat. Pull the cover all the way down so that the top part of the cover is on there nice and snug.



Then slide them over the seat part, and line up the seam with the front of the seat, and work towards the middle. Tuck them in, between the seat and back portion



Tuck all extra material between the seat and back portion.



Once this is done, fasten all the hooks underneath the seat, in coordination with the two hexagon pieces.

### 3 Console cover



**Solid console**  
just slide from the front to back, and attach the velcro to make it fit snug and tight.



**Opening console.**  
First put the cover on the lid. Bottom part of console slide cover over from front to back.



With a console that has hinges on the side, please undo the velcro pieces first, and then re attach them once the cover is in place.